



ML

ML 160W E27 225-235V SG 1SL/24

Mixed Light lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	E27
Operating Position	VBU/VBD30 [Vertical or Base Up/Base Down +/-30D]
Life to 50% Failures (Nom)	8,000 hour(s)

Light Technical	
Chromaticity Coordinate X (Nom)	371
Chromaticity Coordinate Y (Nom)	380
Correlated Color Temperature (Nom)	3600 K
Luminous Efficacy (rated) (Nom)	17 lm/W
Color rendering index (CRI)	65

Operating and Electrical	
Power Consumption	165.0 W
Voltage (Nom)	230 V
Voltage (Nom)	230 V


Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Coated glass
Bulb Material	Soft Glass
Bulb Shape	BF75

Approval and Application	
Mercury (Hg) Content (Nom)	13 mg
Energy Consumption kWh/1000 h	160 kWh


Product Data	
Order product name	ML 160W E27 225-235V SG 1SL/24
Full product name	ML 160W E27 225-235V SG 1SL/24
Full product code	871150018135030
Order code	928095056891
Material Nr. (12NC)	928095056891
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500181350
Numerator - Packs per outer box	24
EAN/UPC - Case	8711500181367

Dimensional drawing




Product	D (max)	C (max)
ML 160W E27 225-235V SG 1SL/24	76 mm	173 mm

Photometric data

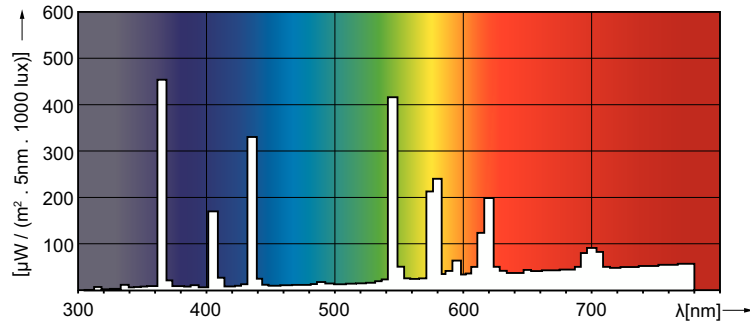


Spectral Power Distribution Colour - ML 160W E27 225-235V SG 1SL/24

Lifetime

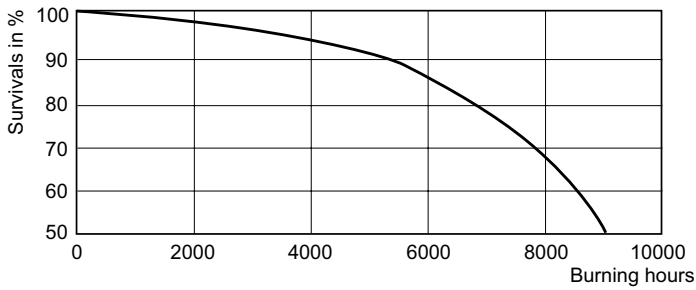

Life Expectancy Diagram - ML 160W E27 225-235V SG 1SL/24

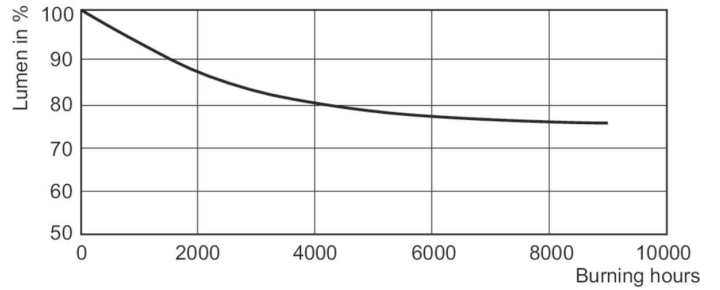

Lumen Maintenance Diagram - ML 160W E27 225-235V SG 1SL/24

