



ML

ML 500W E40 220-230V 1SL/6

Mixed Light lamps

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information	
Cap-Base	E40
Operating Position	VBU/VBD30 [Vertical or Base Up/Base Down +/-30D]
Life to 50% Failures (Nom)	10,000 hour(s)
Light Technical	
Chromaticity Coordinate X (Nom)	396
Chromaticity Coordinate Y (Nom)	387
Luminous Efficacy (rated) (Nom)	26 lm/W
Color rendering index (CRI)	50
Operating and Electrical	
Power Consumption	500.0 W
Voltage (Nom)	225 V
Voltage (Nom)	225 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Coated glass

Bulb Material	Hard Glass
Bulb Shape	ED120

Approval and Application	
Mercury (Hg) Content (Nom)	46 mg
Energy Consumption kWh/1000 h	550 kWh


Product Data	
Order product name	ML 500W E40 220-230V 1SL/6
Full product name	ML 500W E40 220-230V 1SL/6
Full product code	692059027791700
Order code	928097057791
Material Nr. (12NC)	928097057791
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	6920590277917
Numerator - Packs per outer box	6
EAN/UPC - Case	6920590277924

Dimensional drawing




Product	D (max)	C (max)
ML 500W E40 220-230V 1SL/6	122 mm	290 mm

Photometric data

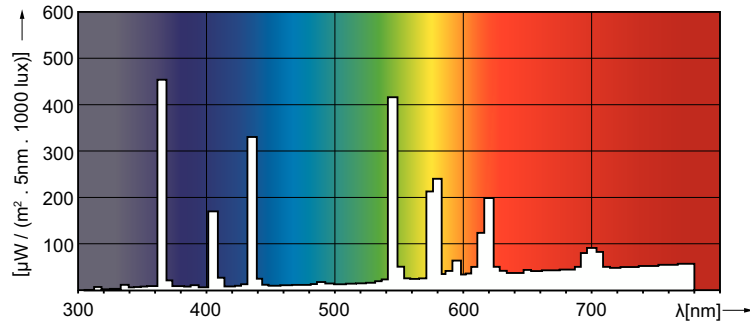


Spectral Power Distribution Colour - ML 500W E40 220-230V 1SL/6

Lifetime

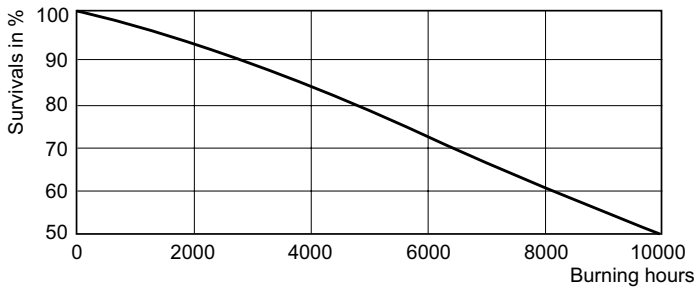

Life Expectancy Diagram - ML 500W E40 220-230V 1SL/6

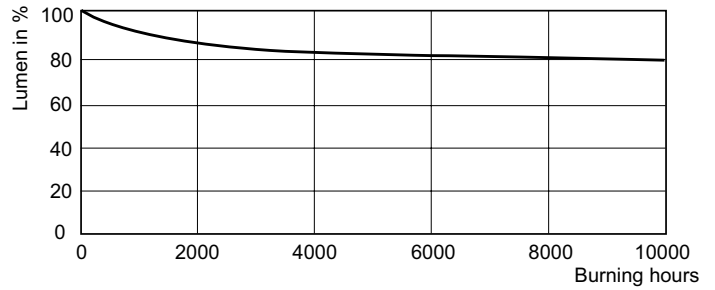

Lumen Maintenance Diagram - ML 500W E40 220-230V 1SL/6

