



MASTER HPI-T Plus

MASTER HPI-T Plus 250W/645 E40 1SL/12

Quartz metal halide lamps with clear outer bulb

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- For use with control gear designed for high-pressure mercury or sodium lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	E40 [E40]
Operating Position	P20 [Parallel +/-20D or Horizontal(HOR)]
Life to 50% Failures (Nom)	20,000 hour(s)

Light Technical	
Color Code	645 [CCT of 4500K]
Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	365
Chromaticity Coordinate Y (Nom)	377
Correlated Color Temperature (Nom)	4500 K
Luminous Efficacy (rated) (Nom)	79 lm/W
Color rendering index (CRI)	65
Arc Length O (Nom)	29 mm

Operating and Electrical	
Power Consumption	247 W
Voltage (Nom)	128 V

Voltage (Nom)	128 V
---------------	-------

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T46 [T 46mm]

Approval and Application	
Mercury (Hg) Content (Nom)	36 mg
Energy Consumption kWh/1000 h	272 kWh


Product Data	
Order product name	MASTER HPI-T Plus 250W/645 E40 1SL/12
Full product name	MASTER HPI-T Plus 250W/645 E40 1SL/12
Full product code	692234199960400
Order code	928481300096

MASTER HPI-T Plus

Material Nr. (12NC)	928481300096
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	6922341999604
Numerator - Packs per outer box	12



EAN/UPC - Case	6922341993213
----------------	---------------

Dimensional drawing



Product	D (max)	O	L	C (max)
MASTER HPI-T Plus 250W/645 E40 1SL/12	47 mm	29 mm	155 mm	255 mm



Photometric data

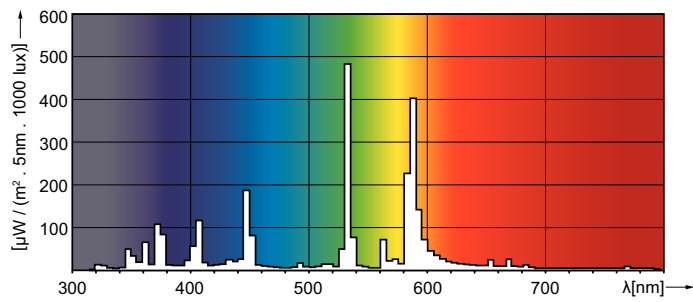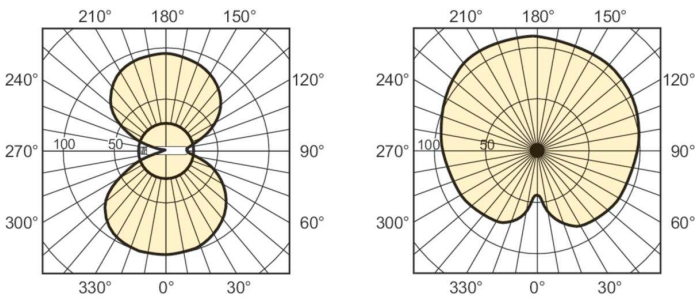

Light Distribution Diagram - MASTER HPI-T Plus 250W/645 E40 1SL/12

Spectral Power Distribution Colour - MASTER HPI-T Plus 250W/645 E40 1SL/12

Lifetime

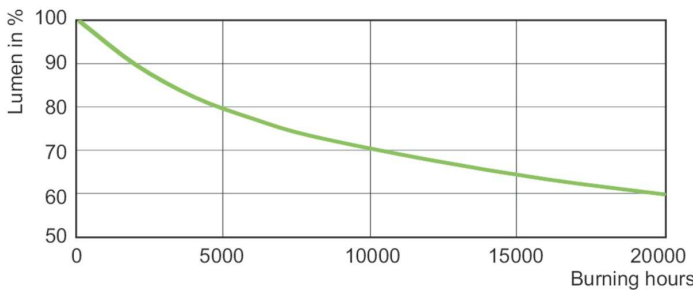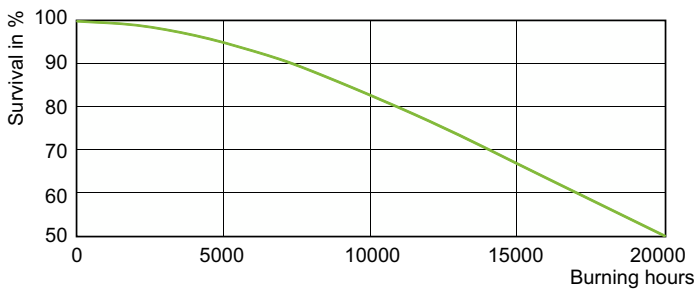

Life Expectancy Diagram - MASTER HPI-T Plus 250W/645 E40 1SL/12

Lumen Maintenance Diagram - MASTER HPI-T Plus 250W/645 E40 1SL/12

MASTER HPI-T Plus

